

Single Drum Vibratory Rollers BW124DH-3, BW124PDH-3




MODEL	Compaction Output (cu. yd/h) at recommended soil layer/lift thickness. *			
	Rock Fill	Gravel, Sand	Mixed Soils	Silt, Clay
BW124DH-3	-	137 - 275	98 - 196	52 - 118
BW124PDH-3	-	137 - 275	98 - 196	65 - 131

MODEL	Compaction Layer Thickness (in).*			
	Rock Fill	Gravel, Sand	Mixed Soils	Silt, Clay
BW124DH-3	-	14	10	6
BW124PDH-3	-	14	10	8

* Compaction output influenced by soil/material type and moisture content.



BW124 Series

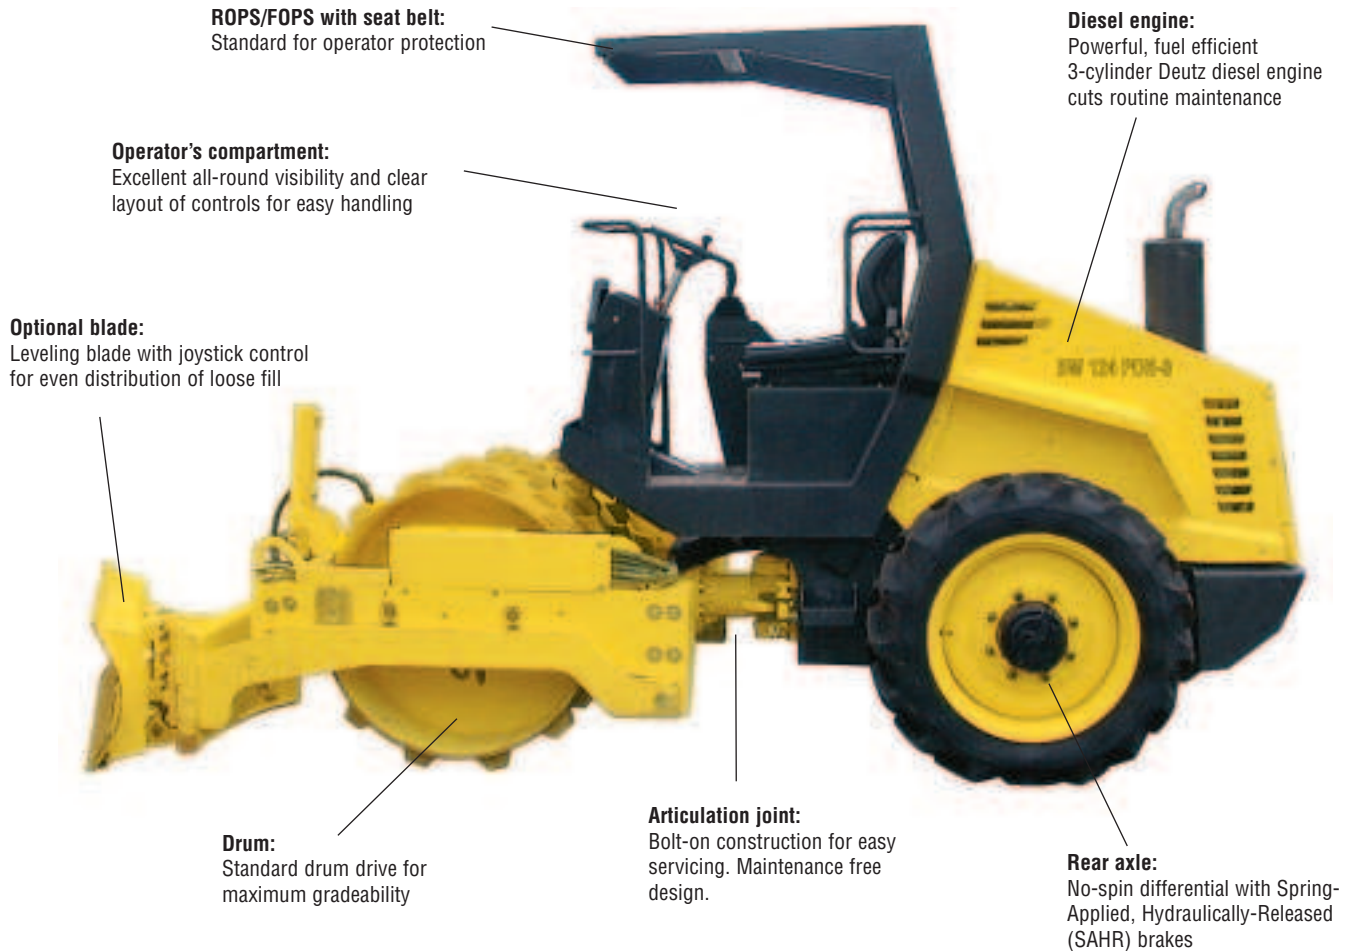

■ *The BW124 Series - The right choice for your soil compaction applications...*

BOMAG draws on its millions of application hours in the single drum market to create a series of machines with large roller features yet compact enough to work in confined areas. The BW124-3 series combines dual travel pumps, no-spin differential and standard drum drive for enhanced tractive effort and gradeability. A powerful EPA certified 3 cylinder diesel engine offers superior fuel economy while delivering ample power for the most demanding applications.

The bolt-on centerjoint provides 35 degrees articulation and 12 degrees oscillation, supplying unmatched maneuverability and full drum contact on irregular terrain. Right hand console positioned travel control lever provides positive control of travel direction and speed. The compact design provides optimal visibility and maneuverability, making this series ideal for a wide range of light duty to large scale compaction applications.

■ Applications:

- Road construction
- Site preparation
- Embankment compaction
- Trench work



Excellent all-around tractive effort and 55 + percent (%) gradeability are achieved with a standard dual travel pump design, no-spin differential and radial piston drum drive travel motor.



Locking, two (2) position engine hood opens to provide access to the reverse positioned engine, all critical components and maintenance items.

■ Handling is Easier & Safer:

- Console positioned travel lever controls speed and directional changes.
- Operator's platform with adjustable seat ensures operator's comfort.
- Engine exhaust and noise are directed away from the operator.
- Strategic positioning of controls makes operation easy and comfortable.
- Compact design and excellent visibility enhances maneuverability and safety for jobsite operation.
- Rubber buffer, solid block isolators, minimize vibration energy transmitted by the drum and allows for extended, fatigue free operation. Buffers can be individually serviced without drum removal.
- ROPS / FOPS structure with seat belt is standard, for increased operator safety.
- Foot pedal controlled optional leveling blade system, provides precise operation and increased productivity.

Compact design provides optimal visibility and maneuverability

■ Achieve Maximum Productivity:

- Rugged no-spin differential with standard drum drive provides maximum gradeability and tractive effort.
- Standard dual amplitude and optimized frequency combines to provide high centrifugal forces for maximum compaction on a wide variety of material types.
- Powerful 3 – cylinder diesel engine provides ample power even under extreme operating conditions.
- The smooth drum model, BW124DH-3, quickly and efficiently compacts granular and mixed soils.
- The Padfoot model(s), BW124PDH-3 and BW124PDH-3 +blade, deliver maximum productivity on semi-cohesive and cohesive materials.
- The BW124PDH-3 + blade, quickly and efficiently spreads and levels irregular surface material with its leveling blade.
- Lockable engine hood and control panel area protects fluid access points and instruments against vandalism and helps reduce damage related downtime.
- Recessed drum frame bolt holes avoid rounding and shearing off bolt heads when working close to obstacles.
- Front frame is wider than rear tractor, reducing tire damage when working in confined areas.

■ Less Service & Maintenance:

The purchase price is important, but so are the operating costs. Check these features:

- Audible / visual warning indicators for engine oil pressure and temperature, air filter vacuum, brake control and hydraulic charge control.
- The articulation joint is heavy-duty for long service life; a transport lock is provided for protection.
- Vibratory drum mechanism is virtually maintenance free.
- The powerful SAHR (Spring Applied, Hydraulically Released) brakes are virtually maintenance free.
- Oil change intervals are extended with the BOMAG oil filter system up to 2000 hours or 2 years.
- The air / oil cooled Deutz diesel engine reduces maintenance under extreme operating conditions.
- The hydrostatic transmission eliminates gear boxes and mechanical drive components.
- Daily maintenance can be carried out quickly and easily.
- Pressure test ports are built directly into the hydraulic system for quick and simple analysis of all critical pressures.

Featuring...



Bolt-on centerjoint is maintenance-free, providing optimum steering and oscillation angles.



Optional blade system(s) is controlled by strategically positioned floor mounted foot pedals..



Right hand console positioned travel control lever easily regulates travel direction and speed.

With these features and many more, it's easy to see why these models maintain a high residual value while delivering lower lifetime operating costs.

Technical Specifications


BW124 Series

Shipping dimensions

in cubic feet (ft³)

without/with ROPS/FOPS

BW 124 DH-3	286.7 (8.1)	371.9 (10.5)
BW 124 PDH-3	286.7 (8.1)	371.9 (10.5)
BW 124 PDH-3 w/blade	385.9 (10.9)	500.8 (14.2)

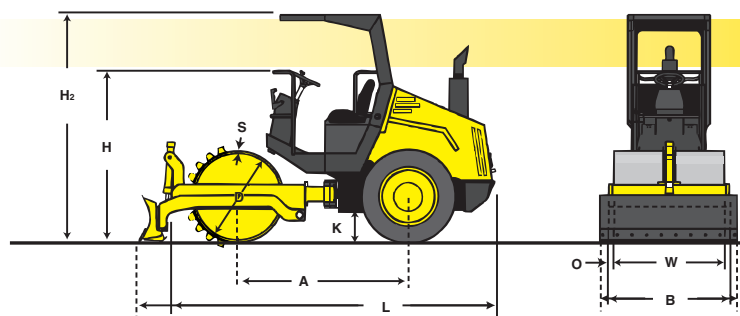

Standard equipment

- ☒ Hydrostatic travel and vibration drives
- ☒ Articulated centerjoint lock
- ☒ Hydrostatic steering
- ☒ Rear axle with Spring-Applied, Hydraulically Released (SAHR) brakes
- ☒ No-Spin differential
- ☒ Lockable control panel
- ☒ Hour meter
- ☒ Warning horn
- ☒ Fuel level indicator
- ☒ Audible / visual warning indicators:
 - Engine oil pressure
 - Engine temperature
 - Air filter vacuum
 - Brake control
 - Charge control
- ☒ Floor positioned foot controls for travel direction and speed.
- ☒ Seat is adjustable for position and height
- ☒ Scrapers
- ☒ Towing hooks front and rear
- ☒ Emergency STOP
- ☒ ROPS / FOPS with seat belt
- ☒ Back-up alarm
- ☒ Working Lights (front & rear)

Optional equipment

- ☐ Special paint
- ☐ Leveling blade
- ☐ Leveling blade w/ angle mechanism

** Optional leveling blade is for surface profiling/contouring and backdragging of loose fill material only. This design is not intended to function as a device for excavation purposes.

Dimensions

in inches (mm)	A	B	D	H	H ₂	K	L	O	S	W
BW 124 DH-3	71.1 (1805)	51.6 (1310)	37.8 (960)	72.8 (1850)	94.5 (2400)	12.6 (320)	131.9 (3350)	2.2 (55)	0.59 (15)	47.2 (1200)
BW 124 PDH-3	71.1 (1805)	51.6 (1310)	35.0 (890)	72.8 (1850)	94.5 (2400)	12.6 (320)	131.9 (3350)	2.2 (55)	0.59 (15)	47.2 (1200)
BW 124 PDH-3 w/blade	71.1 (1805)	59.6 (1515)	35.0 (890)	72.8 (1850)	94.5 (2400)	12.6 (320)	153.5 (3900)	2.2 (55)	0.59 (15)	47.2 (1200)

Technical data

Weights

			BOMAG BW 124 DH-3	BOMAG BW 124 PDH-3	BOMAG BW 124 PDH-3 w/blade
Basic weight	lb (kg)		7055 (3200)	7165 (3250)	7826 (3550)
Operating weight with ROPS/FOPS	lb (kg)		7275 (3300)	7385 (3350)	8047 (3650)
Axle load, drum	lb (kg)		3527 (1600)	3638 (1650)	4299 (1950)
Axle load, wheels	lb (kg)		3748 (1700)	3748 (1700)	3748 (1700)
Static linear load (drum)	lb/in (kg/cm)		74.7 (13.3)	—	—

Dimensions

			BOMAG BW 124 DH-3	BOMAG BW 124 PDH-3	BOMAG BW 124 PDH-3 w/blade
Working width	in (mm)		47.2 (1200)	47.2 (1200)	47.2 (1200)
Track radius, inner	in (mm)		88.2 (2240)	88.2 (2240)	88.2 (2240)
Dimensions	in (mm)		see sketch	see sketch	see sketch

Driving characteristics

			BOMAG BW 124 DH-3	BOMAG BW 124 PDH-3	BOMAG BW 124 PDH-3 w/blade
Speed (1)	mph (km/h)		0-5.6 (0-9)	0-5.6 (0-9)	0-5.6 (0-9)
Maximum gradeability	%		55	55	55

Drive

			BOMAG BW 124 DH-3	BOMAG BW 124 PDH-3	BOMAG BW 124 PDH-3 w/blade
Engine manufacturer			Deutz	Deutz	Deutz
Model			F3L2011	F3L2011	F3L2011
Cooling - cylinder heads			air	air	air
Cooling - cylinder liners			oil	oil	oil
Number of cylinders			3	3	3
Performance ISO 9249	hp (kW)		48 (35)	48 (35)	48 (35)
Speed	rpm		2800	2800	2800
Performance SAEJ 1349	hp (kW)		50 (37)	50 (37)	50 (37)
Speed	rpm		2800	2800	2800
Fuel			diesel	diesel	diesel
Electric equipment	V		12	12	12
Drive system			hydrostatic	hydrostatic	hydrostatic

Drums & Tires

			BOMAG BW 124 DH-3	BOMAG BW 124 PDH-3	BOMAG BW 124 PDH-3 w/blade
Number or pad feet			—	70	70
Area of one pad foot	in² (cm²)		—	12.6 (81)	12.6 (81)
Height of one pad foot	in (mm)		—	2.2 (55)	2.2 (55)
Tire size and tread design			9.5-24 4PR AWT	9.5-24 STR	9.5-24 STR

Brakes

			BOMAG BW 124 DH-3	BOMAG BW 124 PDH-3	BOMAG BW 124 PDH-3 w/blade
Service brake			hydrostatic	hydrostatic	hydrostatic
Secondary/Parking brake			SAHR	SAHR	SAHR

Steering

			BOMAG BW 124 DH-3	BOMAG BW 124 PDH-3	BOMAG BW 124 PDH-3 w/blade
Steering system			oscil. artic.	oscil. artic.	oscil. artic.
Steering method			hydrostatic	hydrostatic	hydrostatic
Steering angle ±	degrees		35	35	35
Oscillating angle ±	degrees		12	12	12

Vibratory system

			BOMAG BW 124 DH-3	BOMAG BW 124 PDH-3	BOMAG BW 124 PDH-3 w/blade
Drive system			hydrostatic	hydrostatic	hydrostatic
Frequency	vpm (Hz)		2460/2460 (41/41)	2460/2460 (41/41)	2460/2460 (41/41)
Amplitude	in (mm)		0.067/0.033 (1.7/0.85)	0.063/0.031 (1.6/0.8)	0.063/0.031 (1.6/0.8)
Centrifugal force	lb (kN)		19125/9675 (85/43)	19125/9675 (85/43)	19125/9675 (85/43)

Capacities

			BOMAG BW 124 DH-3	BOMAG BW 124 PDH-3	BOMAG BW 124 PDH-3 w/blade
Fuel	gal (l)		15.9 (60)	15.9 (60)	15.9 (60)

Subject to technical alterations. Models shown may include optional equipment.

BOMAG
FAYAT GROUP

BOMAG Americas, Inc.

2000 Kentville Rd. • Kewanee, IL 61443

Tel: 309 853-3571 • Fax: 309 852-0350